

Trans1000®

10 year warranty





Demonstration in video

The Trans1000 variable geometry transfer trolley® allows you to handle, lift and work at an ergonomic

It is particularly suitable for handling long loads such as bars, tubes and plates.

Performance and ergonomics


- The variable geometry allows the height (770/1200 mm) and length (1050/1860 mm) of the trolley to be adjusted to suit the desired use.
- Lifted by 2 manual hydraulic cylinders with an arm
- Equipped with 3 swivel castors with brakes and one directional castor with 2-position locking for longitudinal or transverse movement.
- Telescopic lever operating the lift.
- Equipped with folding stakes for better load support and motorized esca rollers to facilitate load sliding.


• Wide range of standard and customised accessories depending on the load to be handled, electric lift, length up to 5 m.

Maintenance and warranty

- 10 year warranty excluding wearing parts.
- Spare parts available from stock.
- Maintenance contract on request: service provided by our teams. Subscription possible for new or existing Manuvit equipment.

Moreover, as nothing should justify throwing away a product under the pretext that it is damaged, we are able to put back in use all the materials of our manufacture and this, without limit of duration.



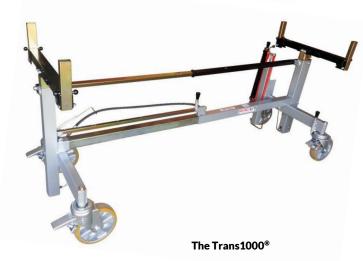







Directional castors





Technical specifications

Reference	Capacity (kg)	Min/Max length (mm)	Min/max height (mm)	Dim. HT (mm) *	Wheel Ø (mm)	Bandage	Weight (kg)
950 000 0179	1 000	1050/1860	770/1200	1160x660x770	200	Polyurethane	76

* Depth x width x height



