

Lev 600 mixer

3-year
guarantee



Demonstration
on video

Stacker in epoxy painted steel with frame fitted with variable geometry (patented) with manual lift and movement.

Fitted with a rotofûts® mixer/emptying device for picking up, mixing and turning Ø 600 mm metal drums in a tank up to 1100 mm high.

Performance

- Robust construction suitable for intensive use.
- Manual model: 2 foot lift speeds, 40 or 70 mm/pump.
- Rotofûts® mixer: electric rotation by geared motor with brake. Rotation speed of 9 rpm in forward/backward direction. Standard programme: repetitions of 7 forward turns - 7 reverse turns. The number of cycle repetitions is set by a programmable timer. IP55 waterproof electrical box with male and female sockets. 220V-380V three-phase mains supply with 4.50 m extension lead.

Security

- Variable geometry allowing the longitudinal members to be moved apart for greater stability.
- Rear wheels fitted with foot protection and brake.
- Device to prevent the stacker from tipping over in the event of an obstacle on the descent path.
- Protective structure not included when used in automatic mode.
- Complies with the Machinery Directive 2006/42/EC and ISO 3691-5.

Maintenance and warranty

- 3-year guarantee excluding wearing parts.
- Maintenance contract on request: service provided by our teams. Subscription possible for new Manuvit equipment or equipment already in service.

What's more, as there should be no reason to throw away a product just because it's damaged, we are able to restore all the equipment we manufacture to working order for an unlimited period.

Complies with Machinery Directive 2006/42/EC.



Lev600 mixer

Technical specifications


References	Capacity (kg)	Lift stroke (mm)	Lifting speed	Height. excl. VAT (mm)	Side rail spacing (mm)	Front wheels	Rear wheels with brakes	Weight (kg)
820 200 3151	350 ⁽¹⁾	1400	40 or 70 mm/pump	1910	500 à 1000	Ø 80 mm nylon bogie	Ø 125 mm nylon	230

⁽¹⁾ 350 kg capacity at 350 mm from masts in accordance with ISO 3691-5 standard

Variable geometry explained



- The frame moves outwards to adapt to the load to be handled.
- Useful spacing of longitudinal members :
Lev 600: from 500 to 1000 mm.

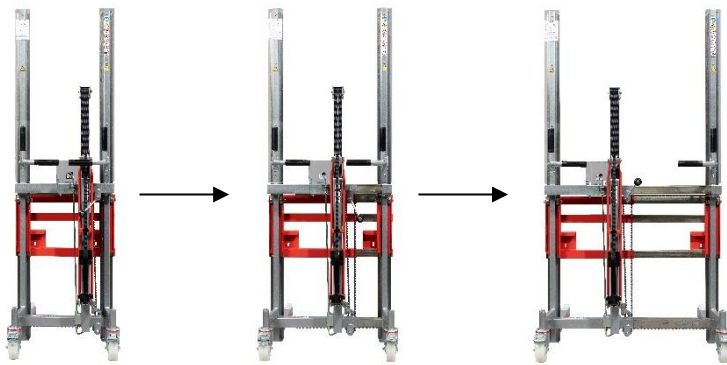

Video demonstration



Options

- Jaw inserts with anti-slip stops for plastic and smooth metal drums with rims, part no. 821 000 0513.

Our rental solutions :

With terms from 24 to 60 months, our long-term leases allow you to :

- Preserve your cash flow and investment capacity;
- Use your operating budget instead of your investment budget to better match costs and benefits;
- Upgrade your fleet according to your needs;
- Work with recent, reliable equipment.